




AMERICAN SKF BEARING MFG.CORP.

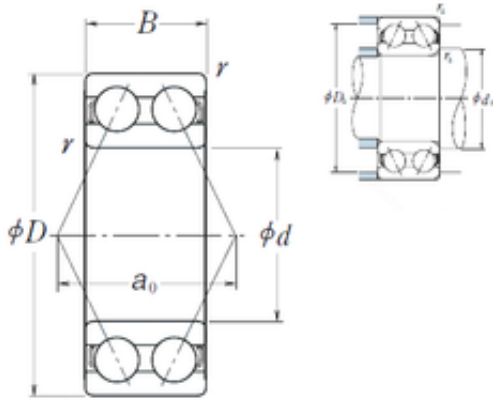

NSK 5205 Bearing

Bearing No. 5205

| | |
|-------------------------------|---------------|
| Size | 25x52x20.6 mm |
| Bore Diameter | 25 mm |
| Outer Diameter | 52 mm |
| Width | 20,6 mm |
| d | 25 mm |
| D | 52 mm |
| B | 20,6 mm |
| C | 20,6 mm |
| a | 26,8 mm |
| r min. | 1 mm |
| da min. | 31 mm |
| da max | 46 mm |
| ra max. | 1 mm |
| Weight | 0,19 Kg |
| Basic dynamic load rating (C) | 21,3 kN |
| Basic static load rating (C0) | 14,7 kN |
| (Grease) Lubrication Speed | 8 500 r/min |
| SRI | 4.13 |
| hidYobi | 5205 |
| LangID | 1 |
| D_ | 52 |
| SREX | 0.02 |
| B_ | 20.6 |
| hidTable | ecat_NSANGBD |
| Oil rpm | 11000 |
| SRE | 4.13 |

5205 Bearing 2D drawings and 3D CAD models



AMERICAN SKF BEARING MFG.CORP.

| | |
|------------|-----------|
| mass | 0.19 |
| GRS rpm | 8500 |
| ra | 1 |
| SRIX | 0.02 |
| D_a | 46 |
| SRIN | 0 |
| C0 | 14.7 |
| SREN | 0 |
| DE_ | 46.968 |
| Prod_Type3 | ACBB_DR_A |
| da | 31 |
| DA_ | 7.938 |
| Z_ | 9 |
| ALP | 50 |
| yobi | 5205 |
| ao | 26.8 |
| SDM_ | 39 |
| r | 1 |
| KBRG | 1121 |
| DI_ | 31.032 |